


2:1 CUT MAX.
3:1 FILL MAX.

2:1 CUT MAX.
3:1 FILL MAX.

RETAIL/MIXED USE LOCAL STREET

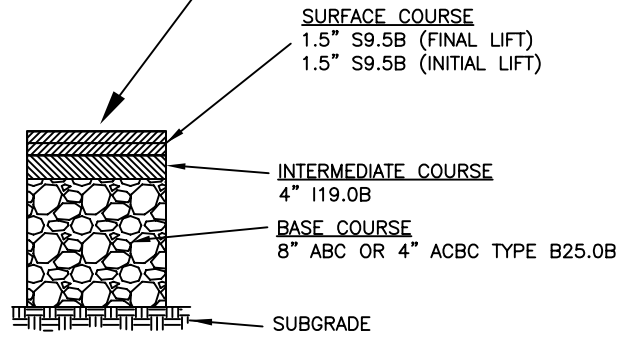

TYPICAL PAVEMENT SECTION

NOTES:

1. SIDEWALK SHALL BE PROVIDED ON BOTH SIDES OF THE STREET.
2. SEE SECTION II. B. FOR ADDITIONAL DESIGN CRITERIA.
3. BASE COURSE TO EXTEND SIX INCHES BEYOND BACK OF CURB THEN TAPER OUT AT A FOURTY-FIVE DEGREE ANGLE.
4. REFER TO STANDARD DRAWING 285.1 FOR PARALLEL PARKING LAYOUT.

KEY

- (R) 2'-6" STD. CURB AND GUTTER
- (S) 4" CONCRETE SIDEWALK

NOT TO SCALE

REV. DATE	08/01/17
STD. NO.	220.4