


INDUSTRIAL COLLECTOR STREET  
(TWO LANE SECTION)

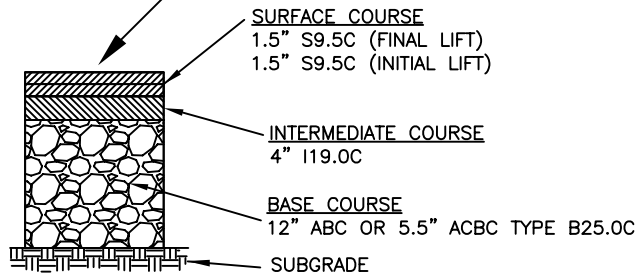

TYPICAL PAVEMENT SECTION

KEY

- (R) 2'-6" STANDARD CURB AND GUTTER
- (S) 4" CONCRETE SIDEWALK
- (T) 1'-6" MEDIAN CURB AND GUTTER

NOTES:

1. SIDEWALK SHALL BE PROVIDED ON BOTH SIDES OF THE STREET.
2. SEE SECTION II. B. FOR ADDITIONAL DESIGN CRITERIA.
3. FOR MEDIAN DIVIDED FACILITIES, A MINIMUM TWENTY (20) FOOT WIDE MEDIAN WITH ONE FOOT SIX INCH CURB AND GUTTER IS NEEDED. IF A LEFT-TURN LANE IS NOT NEEDED, THE MEDIAN SHALL BE LANDSCAPED.
4. BASE COURSE TO EXTEND SIX INCHES BEYOND BACK OF CURB THEN TAPER OUT AT A FORTY-FIVE DEGREE ANGLE.
5. TREE TO BE PLANTED FOUR FEET FROM SIDEWALK.

NOT TO SCALE

<b>REV. DATE</b>
10/01/15
<b>STD. NO.</b>
250.2